

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number
WO 01/52499 A2

(51) International Patent Classification⁷: H04L 29/00

(21) International Application Number: PCT/US01/00942

(22) International Filing Date: 12 January 2001 (12.01.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/483,351 14 January 2000 (14.01.2000) US

(71) Applicant: QUALCOMM INCORPORATED [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(72) Inventor: LIOY, Marcello; 7588 Charmant Drive #1924,
San Diego, CA 92122 (US).

(74) Agents: WADSWORTH, Philip, R. et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF AVOIDING PPP TIME-OUTS DURING IPCP NEGOTIATIONS

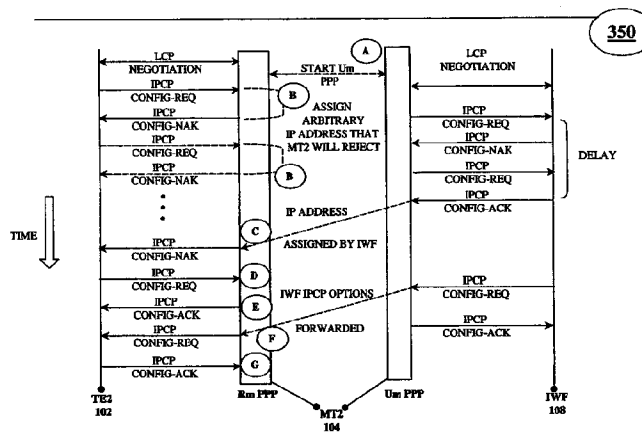

(57) Abstract: A method for maintaining IPCP address negotiations in a wireless communication network is presented. The method includes a communication device receiving a message requesting an IP address, such as a Config-Request message, from a terminal device, which is coupled to the communication device. The communication device then generates a message requesting an IP address, such as a Config-Request message, and forwards it to a peer (IWF) within the network. The communication device then determines whether it has received an assigned IP address from the IWF in response to the IP address request message. In response to determining that the communication device has not received the assigned IP address from the IWF, the communication device transmits a message with an arbitrary IP address, such as a Configure-Nak message, to the terminal device. The arbitrary IP address contained within the message will be rejected by the communication device, upon receipt of future Configure-Requests containing the arbitrary address. This triggers the terminal device to keep transmitting additional IP address request messages until the communication device has received the assigned IP address.

METHOD OF AVOIDING PPP TIME-OUTS DURING IPCP NEGOTIATIONS

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

This invention generally relates to the field of wireless communications. More particularly, the present invention relates to a novel method of avoiding time-outs to sustain IPCP address negotiations.

10

2. Description of Related Art

15

Recent innovations in wireless communication and computer-related technologies, as well as the unprecedented growth of Internet subscribers, have paved the way for mobile computing. In fact, the popularity of mobile computing has placed greater demands on the current Internet infrastructure to provide mobile users with more support. A crucial part of meeting these demands and providing users with the necessary support is the use of Code Division Multiple Access (CDMA) technology in wireless communication systems.

20

25

30

CDMA is a digital radio-frequency (RF) channelization technique defined in the Telecommunications Industry Association/Electronics Industries Association Interim Standard-95 (TIA/EIA IS-95), entitled "MOBILE STATION-BASE STATION COMPATIBILITY STANDARD FOR DUAL-MODE WIDEBAND SPREAD SPECTRUM CELLULAR SYSTEM", published in July 1993 and herein incorporated by reference. Wireless communication systems employing this technology assign a unique code to communication signals and spread these communication signals across a common (wideband) spread spectrum bandwidth. As long as the receiving apparatus in a CDMA system has the correct code, it can successfully detect and select its communication signal from the other signals concurrently transmitted over the same bandwidth. The use of CDMA produces an increase in system traffic capacity, improves overall

call quality and noise reduction, and provides a reliable transport mechanism for data service traffic.

FIG. 1 illustrates the basic elements of such a wireless data communication system 100. Artisans of ordinary skill will readily appreciate that these elements, and their interfaces, may be modified, augmented, or subjected to various standards known in the art, without limiting their scope or function. System 100 allows a mobile terminal equipment, TE2 device 102 (e.g., the terminal equipment such as laptop or palmtop computer) to communicate with an Interworking Function (IWF) 108. System 100 includes a wireless communication device, MT2 device 104 (e.g., wireless telephone), and a Base Station/Mobile Switching Center (BS/MSC) 106. The IWF 108 serves as a gateway between the wireless network and other networks, such as the Public Switched Telephone Network or wireline packet data networks providing Internet- or Intranet-based access. An L interface couples IWF 108 to BS/MSC 106. Often the IWF 108 will be co-located with the BS/MSC 106. The TE2 device 102 is electronically coupled to the MT2 device 104 via the R_m interface. The MT2 device 104 communicates with the BS/MSC 106 via the wireless interface U_m . The TE2 device 102 and the MT2 device 104 may be integrated into a single unit (e.g., MT0 device) or may be separated out, as in the case of an installed mobile phone unit in which a laptop is the TE2 device 102 and the transceiver is the MT2 device 104. It is important to note that, as indicated by FIG. 2, the combination of the TE2 device 102 and the MT2 device 104, whether integrated or separate, is generally referred to as a mobile station (MS) 103.

Other support is made possible by applying various well-known protocols to control, manage, or otherwise facilitate different aspects of wireless communications. For example, the life-blood of the Internet infrastructure, the Internet Protocol (IP), has been incorporated in many wireless communication services to accommodate packet-oriented services. The IP protocol specifies the addressing and routing of packets (datagrams) between host computers and is defined in Request For Comment 791 (RFC 791) entitled, "INTERNET

PROTOCOL DARPA INTERNET PROGRAM PROTOCOL SPECIFICATION," published September 1981.

The IP protocol is a network layer protocol that encapsulates data into IP packets for transmission. Addressing and routing information is affixed in the header of the packet. IP headers contain 32-bit addresses that identify the sending and receiving hosts. These addresses are used by intermediate routers to select a path through the network for the packet towards its ultimate destination at the intended address. Thus, the IP protocol allows packets originating at any Internet node in the world to be routed to any other Internet node in the world.

Another well-known protocol incorporated in wireless communications systems is the Point-to-Point Protocol (PPP) protocol, which provides, *inter alia*, Internet access. The PPP protocol is described in detail in Request for Comments 1661 (RFC 1661), entitled "THE POINT-TO-POINT PROTOCOL (PPP)", published July 1994.

Essentially, the PPP protocol specifies a method for transporting multi-protocol datagrams over point-to-point links and contains three main components: a method of encapsulating multi-protocol datagrams; a Link Control Protocol (LCP) for establishing, configuring, and testing a data link connection; and a family of Network Control Protocols (NCPs) for establishing and configuring different network-layer protocols.

In an effort to provide a host of services on wireless communication systems, various standards have been developed to accommodate the wireless data transmission between the TE2 device 102 and the IWF 108. For example, the TIA/EIA IS-707.5 standard, entitled "DATA SERVICE OPTIONS FOR WIDEBAND SPREAD SPECTRUM SYSTEMS: PACKET DATA SERVICES," published February 1998, and herein incorporated by reference, defines requirements for support of packet data transmission capability on TIA/EIA IS-95 systems and specifies a suite of packet data bearer services.

In particular, the IS-707.5 standard provides certain packet data service

modes that may be used to communicate between the TE2 device 102 and IWF 108 via BS/MS 106. In doing so, IS-707.5 introduces the Network Model, which provides a specific mode of operation. The Network Model represents the situation where a first PPP link is set up between the TE2 device 102 and the MT2 device 104, and a second PPP link, independent of the first, is set up between the MT2 device 104 and the IWF 108. This model makes the MT2 device 104 responsible for unframing any received PPP packets and re-framing them before forwarding them to their final destination as well as providing mobility management and network address management.

FIG. 2 illustrates the protocol stacks in each entity of the IS-707.5 Network Model. At the far left of FIG. 2 is a protocol stack, shown in conventional vertical format, depicting the protocol layers running on the TE2 device 102 (e.g., the mobile terminal, laptop or palmtop computer). The TE2 protocol stack is illustrated as being logically connected to the MT2 device 104 protocol stack over the R_m interface. The MT2 device 104, is illustrated as being logically connected to the BS/MS 106 protocol stack over the U_m interface. The BS/MS 106 protocol stack is, in turn, shown as being logically connected to the IWF 108 protocol stack over the L interface.

As an illustration, the protocols depicted in FIG. 2, operate as follows: the PPP layer on the TE2 102 device associated with the R_m interface (i.e., PPP_R 208), encodes packets from the upper layer protocols 204, and the network layer IP protocol 206. The PPP_R layer 208 then transmits the packets across the R_m interface using an applicable protocol, such as, for example, the TIA/EIA 232-F protocol 210, and the packets are received by the TIA/EIA-232-F-compatible port on the MT2 device 104. The TIA/EIA-232-F standard is defined in "INTERFACE BETWEEN DATA TERMINAL EQUIPMENT AND DATA CIRCUIT-TERMINATING EQUIPMENT EMPLOYING SERIAL BINARY DATA INTERCHANGE", published in October 1997 and herein incorporated by reference. It is to be understood that other standards or protocols known to artisans of ordinary skill in the art may be used to define the transmission

across the R_m interface. For example, other applicable R_m interface standards include, the "UNIVERSAL SERIAL BUS (USB) SPECIFICATION, Revision 1.1", published in September 1998, and the "BLUETOOTH SPECIFICATION VERSION 1.0A CORE, published in July 1999, both incorporated by reference.

5 The TIA/EIA 232-F protocol 212 on the MT2 device 104 receives the packets from the TE2 device 102 and passes them to the PPP_R layer 213 of the MT2 device 104. The PPP_R layer 213 unframes the packets encapsulated in the PPP frames and typically, when a data connection is up, layer 213 transfers the packets to the PPP layer associated with the U_m interface (i.e., PPP_U layer 217).
10 PPP_U layer 217 formats the packets in PPP frames for transmission to a PPP_U peer located in the IWF 108. The Radio Link Protocol (RLP) 216 and IS-95 protocol 214, both of which are well known in the art, are used to transmit the packet-encapsulated PPP frames to the BS/MSC 106 over the U_m interface. The RLP protocol 216 is defined in the IS-707.2 standard, entitled "DATA SERVICE
15 OPTIONS FOR WIDEBAND SPREAD SPECTRUM SYSTEMS: RADIO LINK PROTOCOL", published in February 1998 and the IS-95 protocol is defined in the IS-95 standard identified above.

As stated above, the PPP_R protocol 213 transfers the packets to the PPP_U protocol 217 when a data link connection is established. RFC 1661 provides that
20 Link Control Protocol (LCP) packets must be exchanged and negotiated over each PPP link (i.e., PPP_R and PPP_U) in order to establish, configure, and test the data link connection.

Once the LCP packets are exchanged, the link options negotiated, and the data link connection established, a network layer connection must be
25 established between the TE2 device 102 and the IWF 108. Such a connection employs protocols 206, 212, 218, 230, that include, for example, the IP protocol. The negotiating, configuring, enabling, and disabling of the IP protocol on both ends of the PPP links is provided by the well-known Internet Protocol Control Protocol (IPCP). IPCP is a part of a family of Network Control Protocols (NCPs)
30 included in the PPP protocol and is described in Request for Comment (RFC)

1332, "THE PPP INTERNET PROTOCOL CONTROL PROTOCOL (IPCP)", published in May 1992.

The IPCP protocol employs the standard PPP Configure-Request, Configure-Ack, and Configure-Nak messages to negotiate various options, including the request and designation of IP addresses. IPCP provides that a requester requesting an IP address, generates a Configure-Request message, which contains a particular address. If the particular IP address is acceptable, a Configuration-Ack message is sent by a peer to the requester. If the particular IP address is not acceptable, then the peer sends a Configure-Nak message containing a suggested IP address. The requester then transmits a new Configure-Request message with the suggested IP address and the peer responds with a Configure-Ack.

It is only possible to assign single IP address across the PPP_U and PPP_R links as there is no mechanism in IPCP to assign more than one address. This means that the IP address that is assigned from the IWF over PPP_U , must further be assigned to the TE2 over PPP_R . In the Network Model, while IPCP address negotiations can occur separately for both the R_m interface and the U_m interface. As such, the MT2 device 104 must first negotiate an IP address over the U_m interface with the IWF 108 at one end of the PPP_U link, before the address can be assigned to the TE2 device 102 at the other end of the PPP_R link.

The consummation of IPCP address negotiations may be obstructed, however, by operational delays. For example, such delays can occur if the link between the MT2 device 104 and the IWF 108 is slower than the link between the TE2 device 102 and the MT2 device 104. As such, there exists a possibility that IPCP address negotiations are reached faster on the R_m link than on the U_m link. The TE2 device 102 may, therefore, request an IP address from the MT2 device 104, which cannot be granted because the MT2 device 104 has not completed the requisite address negotiations on the U_m link to render an IP address from the IWF 108. Although the TE2 device 102 is capable of waiting for the MT2 device 104 to eventually render an IP address, there are

implementation-specific time-outs on the TE2 device 102, which can cause the TE2 device 102 to abort the IP address request, and therefor PPP negotiations altogether.

Another example of operational delays occurs when the IWF 108 has to
5 get the IP address, which will eventually be assigned to the TE2 device 102, from some other entity before it can pass it on to the MT2 device 104. In doing so, it may take several seconds before the MT2 device 104 receives the IP address.

By way of example, it is noted that some applications running on the TE2 device 102 allow the TE2 device 102 to generate Configure-Request messages
10 every 3 seconds for 3 attempts before the TE2 device 102 times out. In such cases, if it takes more than a total of 9 seconds to receive an IP address, the TE2 device 102 aborts the address request. Clearly, either of the two scenarios noted above can generate delays that can lead to the TE2 device 102 to abort prematurely.

15 Therefore, what is needed is a novel method of avoiding time-outs to sustain IPCP address negotiations.

SUMMARY OF THE INVENTION

The present invention addresses the need identified above by providing
20 a novel method of avoiding time-outs to sustain IPCP negotiations.

Methods consistent with the principles of the present invention as embodied and broadly described herein include a communication device receiving a message requesting an IP address, such as a Config-Request message, from a terminal device which is coupled to the communication device. The
25 communication device then determines whether it has received an assigned IP address from a peer (i.e. IWF) in response to the IP address request message. In response to determining that the communication device has not received the assigned IP address from the IWF, the communication device transmits a message with an arbitrary IP address, such as a Configure-Nak message, to the
30 terminal device. The arbitrary IP address contained within the message will be

rejected by the communication device, which triggers the terminal device to keep transmitting additional IP address request messages until the communication device has received the assigned IP address.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this Specification, illustrate an embodiment of the invention and, together with the description, explain the objects, advantages, and principles of the invention. In the drawings:

10 FIG. 1 is a high level block diagram depicting various elements of a wireless communication system.

FIG. 2 schematically describes the protocol stacks of a wireless communication system.

15 FIG. 3A is a flow-chart diagram describing an embodiment of the invention.

FIG. 3B is a protocol-message flow diagram describing the operation of an embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20

The following detailed description of the embodiments of the present invention refers to the accompanying drawings that illustrate these. Other embodiments are possible and modifications may be made to the embodiments without departing from the spirit and scope of the invention. Therefore, the following detailed description is not meant to limit the invention. Rather the scope of the invention is defined by the appended claims.

25 It will be apparent to one of ordinary skill in the art that an embodiment of the present invention, as described below, may be realized in a variety of implementations, including the software, firmware, and hardware of the entities illustrated in the figures (i.e., TE2 device 102, MT2 device 104, BS/MS

30

106 and IWF 108). The actual software code or control hardware used to implement the present invention is not limiting of the present invention. Thus, the operation and behavior of the present invention will be described without specific reference to the actual software code or hardware components.

5 Such non-specific references are acceptable because it is clearly understood that a person of ordinary skill in the art would be able to design software and control hardware to implement the embodiment of the present invention based on the description herein.

FIG. 3A is a flow-chart diagram depicting an embodiment of the present invention and FIG. 3B is a protocol-message flow diagram describing the operation of an embodiment of the invention. As indicated in FIG. 3A, the MT2 device 104, in block B305, commences PPP negotiations across the U_m interface with the IWF 108. This event is triggered by the start of LCP negotiations on the R_m interface, as depicted in FIG. 3B (see reference numeral A).

15 In block B310, the MT2 device 104 waits until it has received an IPCP Configure-Request message from the TE2 device 102. Once the MT2 device 104 has received a Configure-Request message from the TE2 device 102, the MT2 device 104 progresses to block B315.

20 In block B315, the MT2 device 104 determines whether it has received an IP address, assigned by the IWF 108, in response to the Configure-Request message from the TE2 device 102. If it has not, the MT2 device 104 advances to block B320, where it rejects the IP address contained within the Configure-Request message and transmits a Configure-Nak message with an arbitrary IP address. (See, reference numeral B in FIG. 3B). The arbitrary IP address is an address that will be rejected by the MT2 device 104. Upon transmitting the Configure-Nak message with the arbitrary IP address, the MT2 device 104 loops back to block B310 to await another IPCP Configure-Request message from the TE2 device 102, with the arbitrary IP address. Because the arbitrary IP address is not the IP address assigned by the IWF 108, the MT2 device 104 is directed back

25
30

to block **B320** where it, once again, rejects the IP address contained within the Configure-Request message and transmits a Configure-Nak message with an arbitrary IP address. The arbitrary address may be the same address as the previous iteration or may be a different address. The loop created by the series
5 of blocks **B310-B315-B320** iterate until the MT2 device **104** determines that it has received an IWF **108**-assigned IP address. By engaging the TE2 device **102** and triggering it to generate Configure-Req messages, the MT2 device **104** prevents the TE2 device **102** from timing out, thereby sustaining the IPCP address negotiations. It would also be possible to introduce a delay into the loop which
10 will reduce the number of messages exchanged between the MT2 device **104** and the TE2 device **102**.

Returning back to block **B315**, if the MT2 device **104** determines that it has received an IWF **108**-assigned IP address, the MT2 device **104** progresses to **B325** where it transmits a Configure-Nak message containing the assigned IP
15 address to the TE2 device **102**. (See, reference numeral C). The MT2 device **104** then receives, in block **B330**, a Configure-Request message with the assigned IP address from the TE2 device **102**. (See, reference numeral D).

The MT2 device **104** advances to block **B335**, where it transmits a Config-Ack message to the TE2 device **102**, to acknowledge the Configure-Request
20 message from the TE2 device **102**. (See, reference numeral E). In block **B340**, the MT2 device **104** then transmits the IPCP options negotiated over the U_m link with the IWF **108** to the TE2 device **102**. (See, reference numeral F). The MT2 device **104** then receives, in block **B345**, a Config-Ack message from the TE2 device **104**, acknowledging the options in use by the IWF **108**-assigned IP
25 address. (See, reference numeral G). It is noted that the processes in blocks **B340** and **B345** are not strictly required, as the MT2 device **104** could send any arbitrary IPCP values to the TE2 device **102** since all packets are being framed and unframed through the MT2 device **104**.

Thus, this embodiment is capable of avoiding implementation-specific
30 time-outs by supplying the TE2 device **102** with Configure-Nak messages,

which contain arbitrary IP addresses that will be rejected by the MT2 device 104. The Configure-Nak messages trigger the TE2 device 102 into generating Configure-Request messages. This interplay continues until the MT2 device 104 receives the IWF 108-assigned IP address and forwards this IP address to the
5 TE2 device 102 in a Configure-Nak message. In this manner, the TE2 device 102 is precluded from prematurely aborting due to implementation-specific timeouts and PPP negotiations are sustained.

The foregoing description of preferred embodiments of the present invention provides illustration and description, but is not intended to be
10 exhaustive or to limit the invention to the precise form disclosed. Modifications and variations are possible consistent with the above teachings or may be acquired from practice of the invention. Accordingly, the scope of the invention is defined by the claims and their equivalents.

15 **WHAT IS CLAIMED:**

CLAIMS

1. A method for maintaining IP address negotiations in a wireless communication network, said method comprising:
 - receiving, in a communication device, a message requesting an IP address from a terminal device, said terminal device coupled to said communication device;
 - generating, in said communication device, a message requesting an IP address from said communication network in response to said IP address request message; and
 - determining whether said communication device has received an assigned IP address from said communication network,wherein, in response to determining that said communication device has not received said assigned IP address, said communication device repeatedly transmits a message with an arbitrary IP address to said terminal device to trigger said terminal device to respond by transmitting IP address request messages with said arbitrary IP address and said communication device rejects said arbitrary IP address in said IP address request messages until said communication device has received said assigned IP address from said communication network.
2. The method of Claim 1, wherein said generating includes,
 - forwarding said IP address request message from said communication device to an interworking function included in said communication network, and
 - negotiating with said interworking function to secure said assigned address based on said IP address request message.
3. The method of Claim 2, wherein said determining includes

2 ascertaining whether said interworking function has provided said assigned IP
address in response to said IP address negotiations.

4 The method of Claim 3, wherein, in response to determining that
2 said communication device has received said assigned IP address, said
communication device transmits a message with said assigned IP address to
4 said terminal device.

5 The method of Claim 4, wherein, in response to transmitting said
2 assigned IP address message to said terminal device, said communication
device receives an IP address request message with said assigned IP address
4 from said terminal device.

6 The method of Claim 5, wherein, in response to receiving said IP
2 address request message with said assigned IP address from said terminal
device, said communication device transmits a message acknowledging said IP
4 address request message to said terminal device.

7 The method of Claim 6, wherein, in response to transmitting a
2 message acknowledging said IP address request message to said terminal device,
said communication device transmits a message with configuration options
4 from said interworking function.

8 The method of Claim 7, wherein, in response to transmitting said
2 message with configuration options from said interworking function, said
communication device receives a message acknowledging receipt of said
4 assigned IP address by said terminal device to said interworking function.

9 The method of Claim 8, wherein said IP address request message is
2 an IPCP Configure-Request message.

10. The method of Claim 9, said arbitrary IP address message is an
2 IPCP Configure-Nak message containing one of a plurality of arbitrary IP
addresses that said communication device will reject.

11. The method of Claim 10, wherein said ascertaining whether said
2 interworking function has assigned an IP address in response to said IP address
request message is determined by identifying whether said communication
4 device has received an IPCP Configure-Ack message containing an IP address
from said interworking function.

12. The method of Claim 11, wherein said assigned IP address message
2 is an IPCP Configure-Nak message containing said assigned IP address provided
by said interworking function.

13. The method of claim 12, wherein said IP address request message
2 with said assigned IP address is an IPCP Configure-Request message containing
said assigned IP address.

14. The method of claim 13, wherein said message acknowledging
2 said IP address request message with said assigned IP address is an IPCP
Configure-Ack message.

15. The method of claim 14, wherein said message acknowledging
2 said receipt of said assigned IP address to said interworking function is an IPCP
Configure-Ack message.

16. The method of claim 15, further including introducing a delay of a
2 predetermined duration to reduce the number of times said communication
device repeatedly transmits said arbitrary IP address message and the number of

4 times said terminal device responds with said IP address request messages
containing said arbitrary IP address.

17. A mechanism for maintaining IP address negotiations in a
2 wireless communication network, said mechanism comprising:

a terminal device; and

4 a communication device coupled to said terminal device, said
communication device receiving an IP address request message from said
6 terminal device and, in response, said communication device transmitting an
IP address request message to said communication network;

8 wherein, said communication device determines whether it has
received an assigned IP address from said communication network, and

10 wherein, in response to determining that said communication
device has not received said assigned IP address, said communication device
12 repeatedly transmits a message with an arbitrary IP address to said terminal
device to trigger said terminal device to respond by transmitting IP address
14 request messages with said arbitrary IP address and said communication device
rejects said arbitrary IP address in said IP address request messages until said
16 communication device has received said assigned IP address from said
communication network.

18. The mechanism of Claim 17, wherein said wireless
2 communication network an interworking function and said communication
device transmitting an IP address request message to said communication
4 network includes,

forwarding said IP address request message from said
6 communication device to said interworking function, and

negotiating with said interworking function to secure said
8 assigned address based on said IP address request message.

19. The mechanism of Claim 18, wherein said communication device
2 determines whether it has received an assigned IP address from said
communication network by ascertaining whether said interworking function
4 has provided said assigned IP address in response to said IP address
negotiations.

20. The mechanism of Claim 19, wherein, in response to determining
2 that said communication device has received said assigned IP address, said
communication device transmits a message with said assigned IP address to
4 said terminal device.

21. The mechanism of Claim 20, wherein, in response to transmitting
2 said assigned IP address message to said terminal device, said communication
device receives an IP address request message with said assigned IP address
4 from said terminal device.

22. The mechanism of Claim 21, wherein, in response to receiving
2 said IP address request message with said assigned IP address from said terminal
device, said communication device transmits a message acknowledging said IP
4 address request message to said terminal device.

23. The mechanism of Claim 22, wherein, in response to transmitting
2 a message acknowledging said IP address request message to said terminal
device, said communication device transmits a message with configuration
4 options from said interworking function.

24. The mechanism of Claim 23, wherein, in response to transmitting
2 said message with configuration options from said interworking function, said
communication device receives a message acknowledging receipt of said
4 assigned IP address by said terminal device to said interworking function.

25. The mechanism of Claim 24, wherein said IP address request
2 message is an IPCP Configure-Request message.

26. The mechanism of Claim 25, said arbitrary IP address message is
2 an IPCP Configure-Nak message containing one of a plurality of arbitrary IP
addresses that said communication device will reject.

27. The mechanism of Claim 26, wherein said ascertaining whether
2 said interworking function has assigned an IP address in response to said IP
address request message is determined by identifying whether said
4 communication device has received an IPCP Configure-Ack message
containing an IP address from said interworking function.

28. The mechanism of Claim 27, wherein said assigned IP address
2 message is an IPCP Configure-Nak message containing said assigned IP address
provided by said interworking function.

29. The mechanism of claim 28, wherein said IP address request
2 message with said assigned IP address is an IPCP Configure-Request message
containing said assigned IP address.

30. The mechanism of claim 29, wherein said message acknowledging
2 said IP address request message with said assigned IP address is an IPCP
Configure-Ack message.

31. The mechanism of claim 30, wherein said message acknowledging
2 said receipt of said assigned IP address to said interworking function is an IPCP
Configure-Ack message.

32. The mechanism of claim 31, further including introducing a delay

- 2 of a predetermined duration to reduce the number of times said
communication device repeatedly transmits said arbitrary IP address message
4 and the number of times said terminal device responds with said IP address
request messages containing said arbitrary IP address.

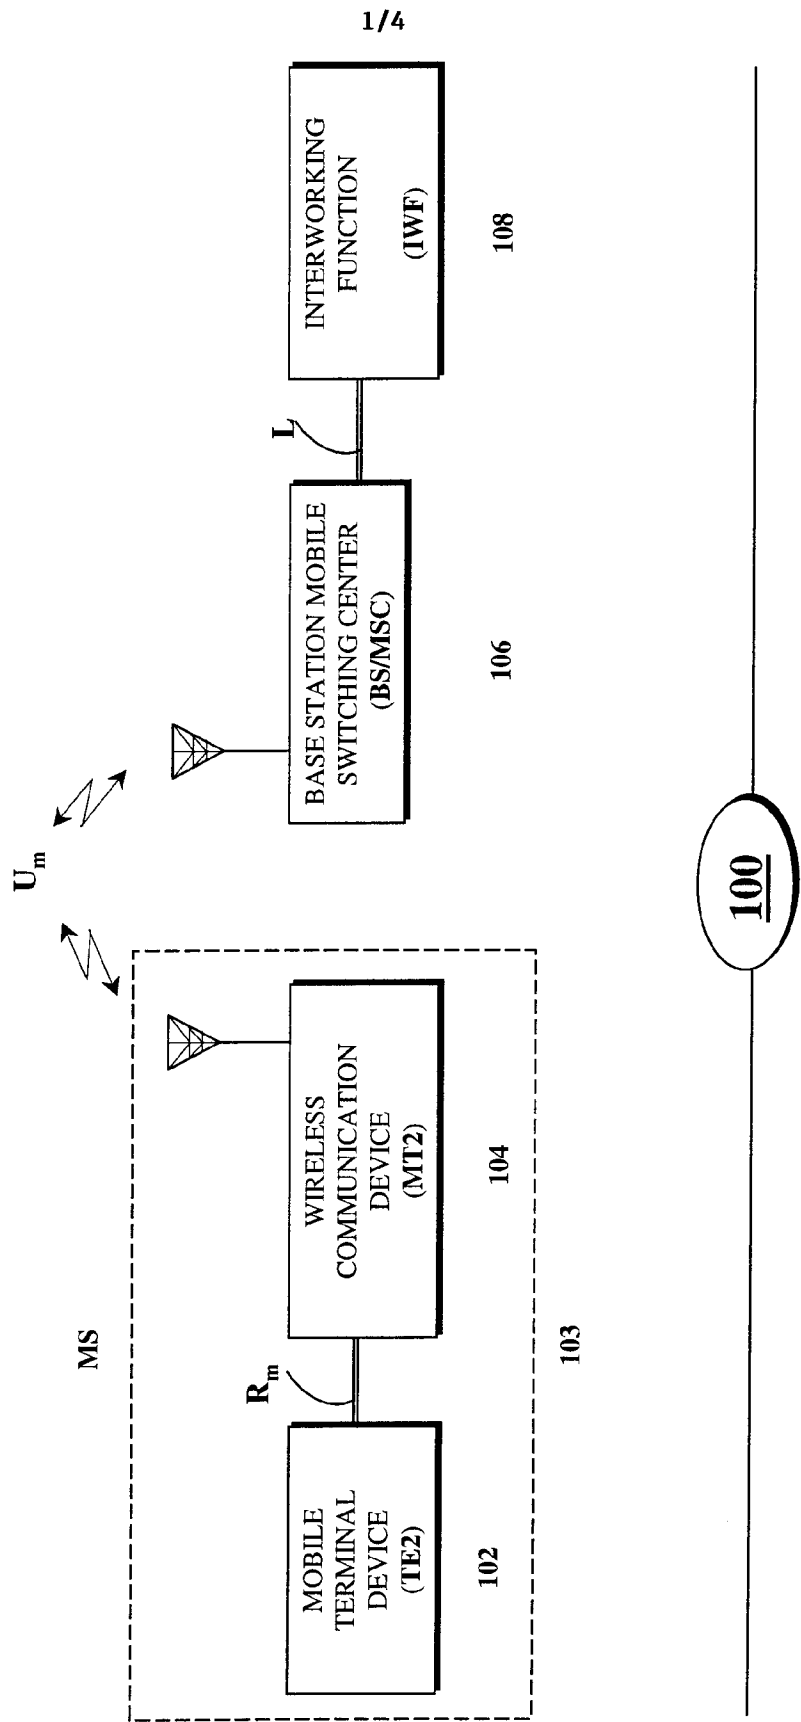


FIG. 1

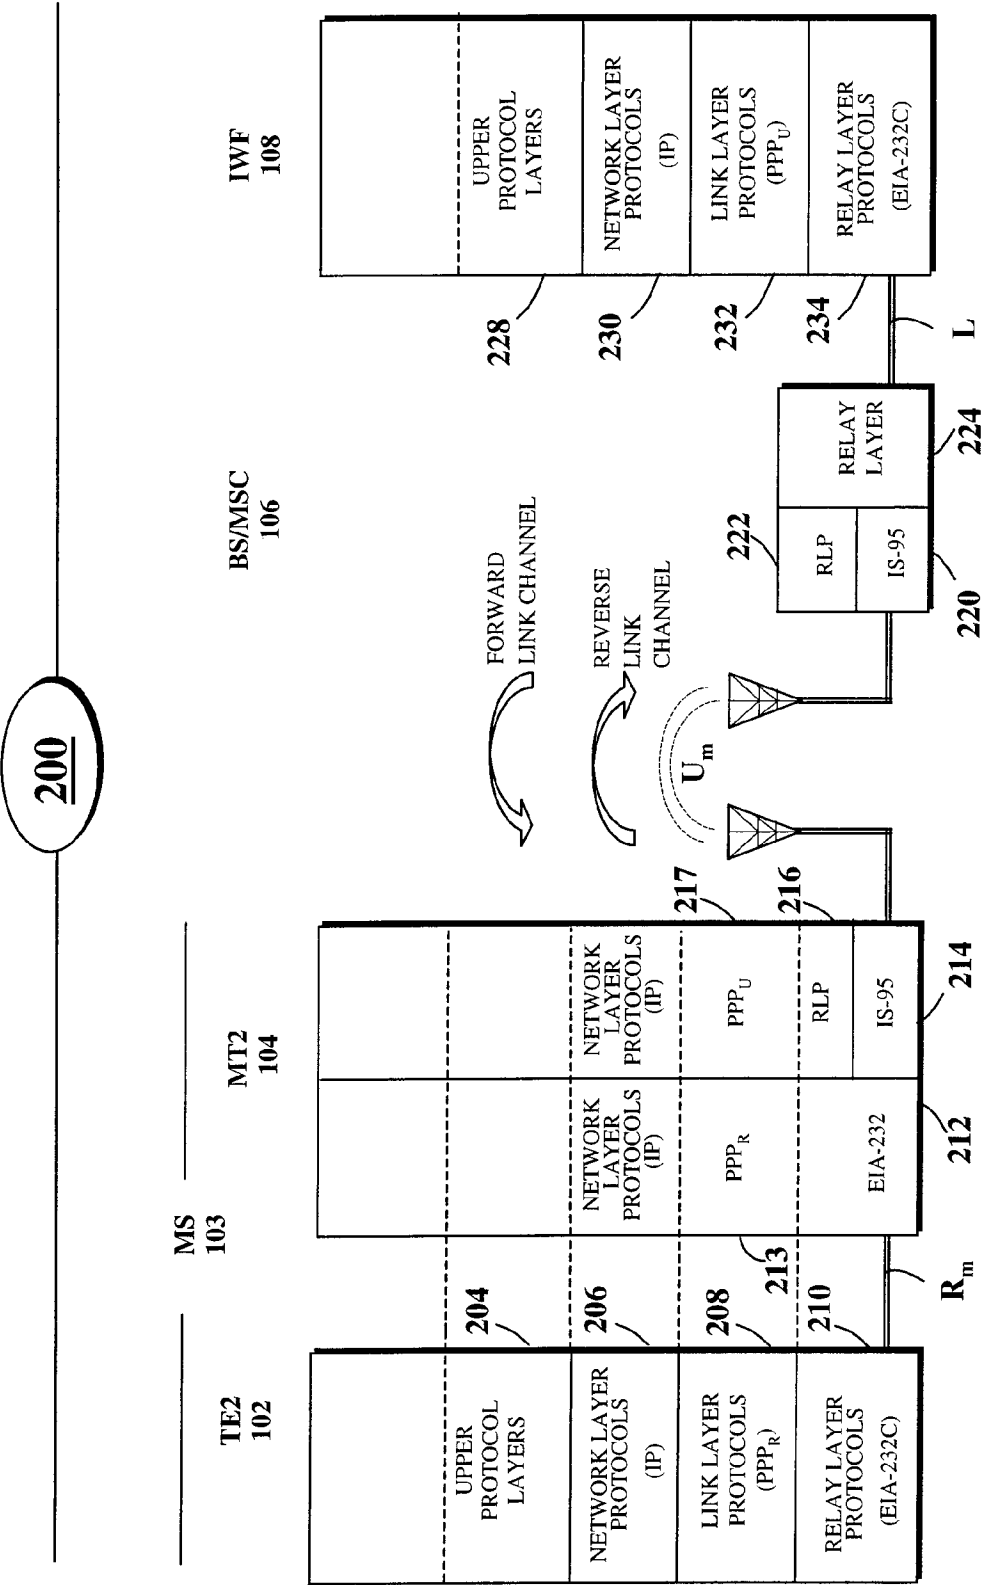


FIG. 2

3/4

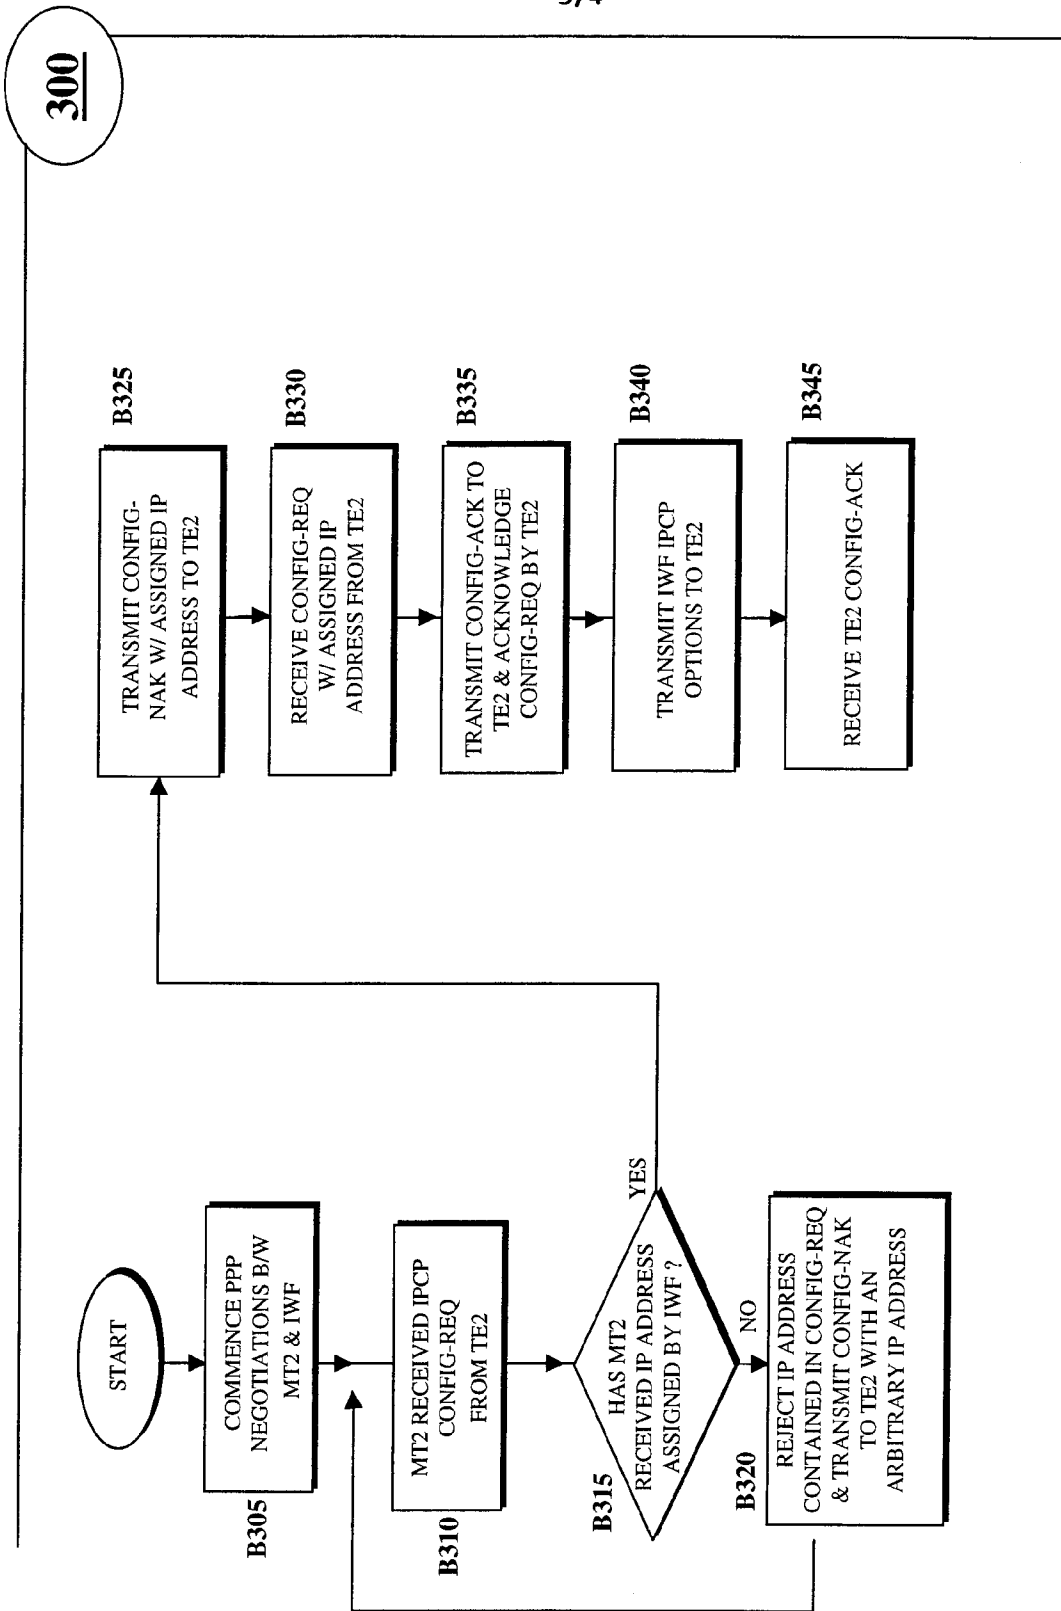


FIG. 3A

350

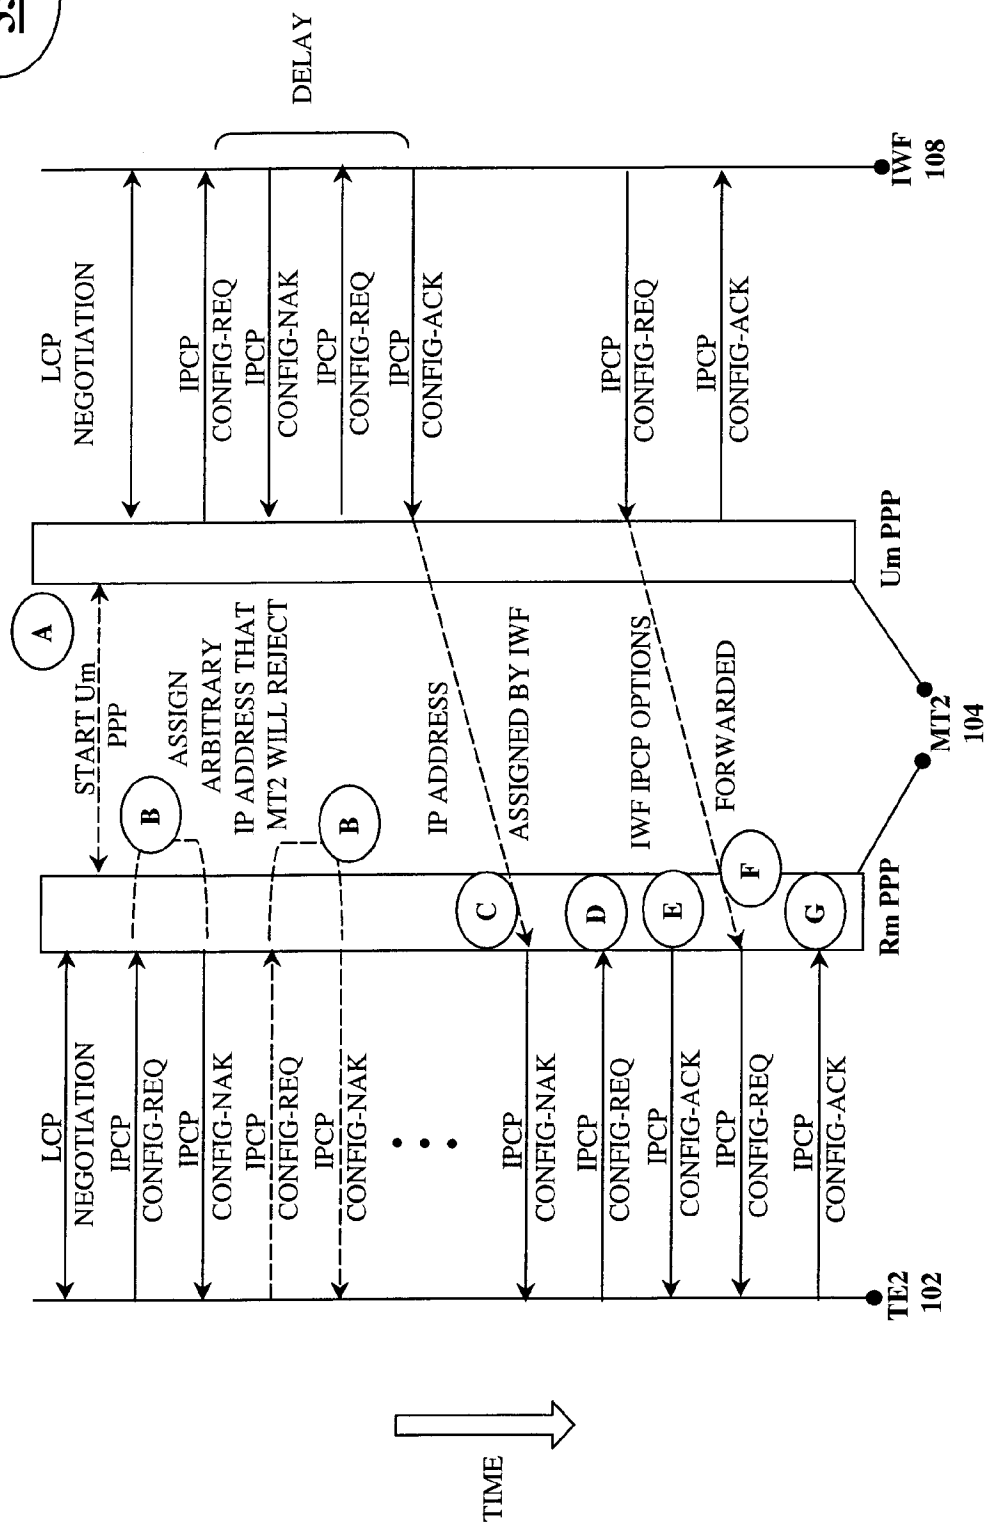


FIG. 3B

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number
WO 01/52499 A3(51) International Patent Classification⁷: **H04L 29/06.**
29/12. H04Q 7/38

(21) International Application Number: PCT/US01/00942

(22) International Filing Date: 12 January 2001 (12.01.2001)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
09/483,351 14 January 2000 (14.01.2000) US(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).(71) Applicant: QUALCOMM INCORPORATED [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).Published:
— with international search report(72) Inventor: LIOY, Marcello; 7588 Charmant Drive #1924,
San Diego, CA 92122 (US).(88) Date of publication of the international search report:
24 January 2002

(74) Agents: WADSWORTH, Philip, R. et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF AVOIDING PPP TIME-OUTS DURING IPCP NEGOTIATIONS

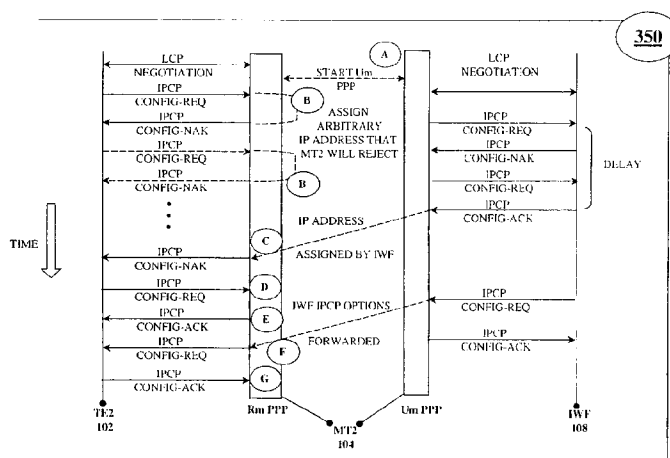

(57) **Abstract:** A method for maintaining IPCP address negotiations in a wireless communication network is presented. The method includes a communication device receiving a message requesting an IP address, such as a Config-Request message, from a terminal device, which is coupled to the communication device. The communication device then generates a message requesting an IP address, such as a Config-Request message, and forwards it to a peer (IWF) within the network. The communication device then determines whether it has received an assigned IP address from the IWF in response to the IP address request message. In response to determining that the communication device has not received the assigned IP address from the IWF, the communication device transmits a message with an arbitrary IP address, such as a Configure-Nak message, to the terminal device. The arbitrary IP address contained within the message will be rejected by the communication device, upon receipt of future Configure-Requests containing the arbitrary address. This triggers the terminal device to keep transmitting additional IP address request messages until the communication device has received the assigned IP address.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/00942

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L29/06 H04L29/12 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 708 655 A (HALL GOERAN ET AL) 13 January 1998 (1998-01-13) abstract column 4, line 34 -column 5, line 60 figures 1-3	1-32
A	WO 99 43133 A (NOKIA TELECOMMUNICATIONS OY ;RAESAENEN JUHA (FI)) 26 August 1999 (1999-08-26) abstract page 3, line 29 -page 4, line 16 figures 7,8	1-32



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

4 October 2001

Date of mailing of the international search report

11/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Bertolissi, E

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/00942

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>MCGREGOR G: "The PPP Internet Protocol Control Protocol (IPCP)" REQUEST FOR COMMENTS, May 1992 (1992-05), XP002123909 cited in the application the whole document -----</p>	1-32

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/00942

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5708655	A	13-01-1998	AU 718114 B2	06-04-2000
			AU 3199797 A	07-01-1998
			BR 9709572 A	10-08-1999
			CA 2257981 A1	18-12-1997
			CN 1228228 A	08-09-1999
			EP 0904665 A1	31-03-1999
			JP 2000512816 T	26-09-2000
			WO 9748246 A1	18-12-1997

WO 9943133	A	26-08-1999	FI 980294 A	10-08-1999
			AU 2282399 A	06-09-1999
			WO 9943133 A2	26-08-1999
